


Discover The New 3M™ Metalworking Belt 341D
Versatile Belt For General Purpose Applications



Maximizing Value in Metalworking

Whether you're doing backstand grinding or wide belt polishing, this new general purpose belt delivers good value for your everyday metalworking needs.

3M

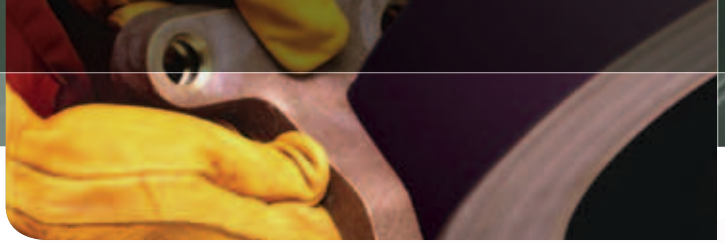

Top Quality Aluminum Oxide

The new 3M™ Metalworking Belt 341D contains top quality aluminum oxide mineral which can contribute to durability, life, and a faster cut for improved productivity and reduced cost.

New Resin Formulation

Using a new resin formulation, 341D is designed for improved mineral adhesion which may result in less shelling, particularly in higher pressure grinding applications.

Product Specs

- Top quality aluminum oxide mineral
- New resin formulation and belt construction
- Strong X-wt. backing
- Grades: 24–P400

Applications

- General purpose dry metalworking applications
- Backstand
- Swing frame
- Stroke sanding
- Portable belt grinding
- Wide belt grinding and polishing



Important Notice to Purchaser

Safety Information: Always read and follow all safety information included with the product. Do not exceed maximum operating RPM's. Use guards provided with machine. Follow safety operation procedures posted in work areas.

Product Use: All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

Warranty and Limited Remedy: Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. 3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be at 3M's option, to replace the product or refund the purchase price.

Limitation of Liability: Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental, or consequential, regardless of the legal theory asserted, including warranty, contract, negligence, or strict liability.



Industrial Business Customer Response Center

900 Bush Avenue,
Building 21-1W-10
St. Paul, MN 55106

Please recycle.
© 3M 2009.
Bolger 9010144
61-5002-8228-2

3M is a trademark of 3M.