


# Henkel Industrial Solutions Metalworking Fluids Selector Guide



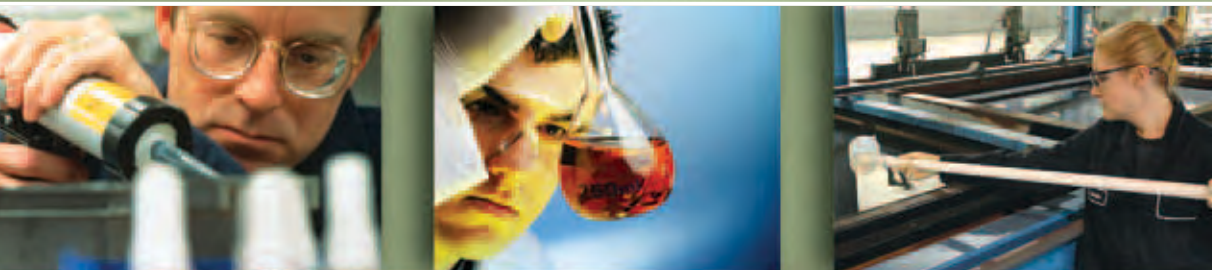

**A**t Henkel Corporation, we provide solutions to industry's biggest challenges. We are dedicated to understanding the markets we serve and developing partnerships that stand the test of time. Our customers have long recognized us as the leader in surface treatment, sealant, adhesive and metalworking lubricant technologies.

**F**or more than 100 years, Henkel has been the leading supplier of state-of-the-art metal pretreatment and metalworking technologies. Henkel offers a full line of metalworking fluids designed to extend tool life, reduce wastes, improve quality and increase throughput. From straight oils to synthetics, our products for metal forming, metal removal and rust prevention contain necessary additives that meet the needs of light to heavy duty industry applications.

**T**o help you compete in today's challenging manufacturing environment, our chemists and engineers work in partnership with our customers to improve design, assembly, productivity and profitability. Whether you need consultation on our products' performance or a turnkey process design, Henkel provides solutions.

### *Henkel Brands*

---

**S**ince the early 1970s, Multan® branded products have been synonymous with metal removal and forming lubricants. From liquids to pastes, these water-miscible and non-water-miscible products are used in manual and automated application systems. Multan® branded products are available in fully synthetic, semi-synthetic, soluble or straight oil formulations.

**H**elping manufacturers since the late 1920s, P3® brand cleaners are for metallic and nonmetallic surfaces, fouling prevention and corrosion protection, together with disinfection of water and use with wastewater treatments. These products are liquid/powdery products designed for use in low and high temperature applications at different pH ranges (acid, neutral and alkaline), and in high-pressure applications, depending on customer conditions.



**T**his selector guides will aid you in choosing the right solution and product for a wide range of common industrial challenges. For additional information on Henkel products, please contact us at 1.800.562.8483.

## TABLE OF CONTENTS

### METALWORKING FLUIDS

Metal Removal.....	2-4
Synthetic .....	2
Semi-Synthetic.....	3
Soluble Oil.....	4
Straight Oil .....	4
Metal Forming .....	5-7
Synthetic .....	5
Soluble Oil.....	6
Solvent.....	6
Straight Oil .....	7
Metal Rolling.....	8
Process Cleaner.....	9
Corrosion Preventatives .....	10-11
Synthetic .....	10
Soluble Oil.....	10
Solvent.....	11
Straight Oil .....	11
Maintenance Cleaner .....	12
Defoamer.....	12
Anti-Weld Spatter .....	12

### PRODUCT LISTING AND INDEX

Index .....	13
-------------	----





# Metalworking Fluids

## METAL REMOVAL

### SYNTHETIC

**Multan® 2307GT™** – Oil-rejecting true solution synthetic fluid designed for machining, grinding and roll forming ferrous alloys. Its unique composition of corrosion inhibitors, lubricity additives and bio-resistant components provide a durable low foaming, hard water stable product

**Multan® 3105™** – An oil-rejecting, synthetic fluid designed for machining, grinding and roll-forming ferrous and non-ferrous alloys. It is also suitable for use on brass, copper and other exotic metals.

**Multan® 3107™** – True solution synthetic fluid designed for ferrous and most non-ferrous alloys. Its unique composition of corrosion inhibitors, lubricity additives and biocides provide a durable product for today's tube forming and moderate machining and grinding operations. Particularly suitable for galvanized and zinc coated steel.

**Multan® 5500™** – Oil-absorbing true solution synthetic fluid designed for machining and grinding ferrous and aluminum alloys. Its unique composition of corrosion inhibitors, Extreme Pressure (EP) additives, lubricity additives and biocides provide a durable, low foaming, hard water stable product for today's light to heavy machining and grinding operations.

**Multan® 8304™** – Oil-absorbing true solution synthetic fluid designed for machining and grinding ferrous and aluminum alloys. Its unique composition of corrosion inhibitors, Extreme Pressure (EP) additives, lubricity additives and biocides provide a durable, low foaming, hard water stable product for today's light to heavy machining and grinding operations.

**Multan® 9103™** – An oil-rejecting synthetic metal removal fluid that has multiple uses in today's manufacturing environment. For use on ferrous alloys only.

Products	Order Item Number	Container Weight (kg)	Container Size	Concentrate Color	Rust-Free Conc. (%) - Cast Iron	Viscosity - H <sub>2</sub> O Solubles (cPs), Oils (Sus @ 100°F)	Oil Content Range (%)	Typical Concentration	Substrate Compatibility			
									Steel	Cast Iron	Aluminum*	Yellow (Copper / Brass)*
<b>Multan® 2307GT™</b>	595405	209	Drum	Blue	3	N/A	0	5%-10%	X	X		
	598807	18	Pail	Pale Amber	4	N/A	0	5%-10%	X	X	X	X
<b>Multan® 3105™</b>	599088	211	Drum									
<b>Multan® 3107™</b>	597524	209	Drum	Pale Amber	4	N/A	0	5%-10%	X	X	X	X
<b>Multan® 5500™</b>	597726	213	Drum	Hazy	3	N/A	0	5%-10%	X	X		
	665569	18	Pail	Hazy	3	N/A	0	5%-10%	X	X		
<b>Multan® 8304™</b>	595400	216	Drum	Hazy	3	N/A	0	5%-10%	X	X		
<b>Multan® 9103™</b>	593832	20	Pail	Blue	3	N/A	0	5%-10%	X	X		
	596262	213	Drum									

\* Individual alloys should be tested prior to recommendation.

## SEMI-SYNTHETIC

**Multan® B-236™** – A low foam, water soluble, semi-synthetic fluid designed for machining and grinding ferrous and aluminum alloys. It is designed for use in areas where soft water or process requirements make foam difficult to control. Ideal for applications where RO/DI water is used.

**Multan® B-524™** – A low foam, water soluble, semi-synthetic fluid designed for machining and grinding ferrous and aluminum alloys. It contains no secondary amines, making it suitable for use in operations that wish to eliminate these amines, but still gain the advantages of a bio-resistant technology. Its wide applicability makes it suitable for use on brass, copper and other exotic metals.

**Multan® B-414™** – A low foam, water soluble, semi-synthetic fluid designed for machining and grinding ferrous and non-ferrous alloys. It is designed for use in areas where soft water or process requirements make foam difficult to control. Its wide applicability makes it suitable for use on brass, copper and other exotic metals. It is also suitable on harder to machine alloys such as stainless steel, titanium or inconel.

Products	Order Item Number	Container Weight (kg)	Container Size	Concentrate Color	Rust-Free Conc. (%) - Cast Iron	Viscosity - H <sub>2</sub> O Solubles (cPs), Oils (Sus @ 100°F)	Oil Content Range (%)	Typical Concentration	EP Additives		Substrate Compatibility			
									Phosphorus	Sulfur	Steel	Cast Iron	Aluminum*	Yellow (Copper / Brass)*
<b>Multan® B-236™</b>	1286491	18	Pail	Amber	2	200	20-25	5%-10%	X		X	X	X	X
	1286460	202	Drum											
<b>Multan® B-524™</b>	1149291	18	Pail	Amber	2	275	25-30	5%-10%	X	X	X	X	X	X
<b>Multan® B-414™</b>	1183199	18	Pail	Amber	2	275	25-30	5%-10%	X	X	X	X	X	X
	1183211	197	Drum											

\* Individual alloys should be tested prior to recommendation.





# Metalworking Fluids

## METAL REMOVAL

### SOLUBLE OIL

**Multan® 2140™** – A soluble oil fluid designed for machining and grinding ferrous and non-ferrous alloys. Its unique composition of corrosion inhibitors, lubricity additives and bio-resistant components provide a durable product for today’s moderate to heavy machining and grinding operations.

### STRAIGHT OIL

**Multan® CR 10™** – This moderate viscosity straight oil with an additive package is useful in general machining applications such as hobbing, milling or shaping, ranging from steel gear machining to cutting tool manufacturing.

**Multan® CR 20™** – A light viscosity oil designed for grinding ferrous and nonferrous alloys. Its unique composition of corrosion inhibitors, Extreme Pressure (EP) additives, anti-mist agents and lubricity additives provide a durable product for today’s grinding and stamping operations.

**Multan® CR 26™** – This unique composition of corrosion inhibitors, Extreme Pressure (EP) additives, anti-mist agents and lubricity additives provides a durable straight oil product for today’s moderate broaching operation.

**Multan® CR 67™** – A straight oil metal removal fluid designed for machining and grinding ferrous and aluminum alloys. It is also suitable for use on brass, copper and other exotic metals. Although originally designed for metal removal applications, this product has also proven superb for light forming.

**Multan® CR 67IC™** – A light viscosity oil designed for grinding ferrous and nonferrous alloys. Its unique composition of corrosion inhibitors, Extreme Pressure (EP) additives, anti-mist agents and lubricity additives provide a durable product for today’s heavy grinding operations.

Products	Order Item Number	Container Weight (kg)	Container Size	Concentrate Color	Rust-Free Conc. (%) - Cast Iron	Viscosity - H <sub>2</sub> O Solubles (cPs), Oils (Sus @ 100°F)	Oil Content Range (%)	Typical Concentration	EP Additives			Substrate Compatibility			
									Phosphorus	Sulfur	Chlorine	Steel	Cast Iron	Aluminum**	Yellow (Copper / Brass)*
Multan® CR 10™	593816	16	Pail	Amber	N/A	120	90-95	100%	X			X	X	X	X
Multan® CR 20™	594878	17	Pail	Amber	N/A	220	90-95	100%	X			X	X	X	X
	594248	181	Drum	Amber	N/A	220	90-95	100%	X			X	X	X	X
Multan® CR 26™	910512	16	Pail	Amber	N/A	220	75-80	100%	X	X		X	X	X	X
Multan® CR 67™	594463	177	Drum	Amber	N/A	75	90-95	100%	X			X	X	X	X
	594274	14	Pail	Amber	N/A	75	90-95	100%	X			X	X	X	X
Multan® CR 67IC™	867957	17	Pail	Amber	N/A	85	90-95	100%	X		X	X	X	X	X

\* Individual alloys should be tested prior to recommendation.

# Metalworking Fluids

## METAL FORMING

### SYNTHETIC

**Multan® F 1009™** – A water soluble synthetic fluid designed for use on medium to heavy forming applications. These applications could include heavy stamping, deep drawing, progressive dies or deep bending. The concentration range of this product makes it ideal for a variety of applications including mower decks, sinks or automotive seat rails.

**Multan® F 2004™** – A synthetic compound designed for deep drawing and stamping of ferrous and aluminum alloys. Its unique composition of corrosion inhibitors, Extreme Pressure (EP) additives and lubricity additives provide a durable product for today's moderate to heavy drawing and stamping operations.

**Multan® F 7270™** – A synthetic compound designed for drawing and stamping of ferrous and aluminum alloys. Excellent performance in high speed progressive die applications.

**Multan® F 737™** – True solution synthetic fluid designed for stamping and drawing. Its unique composition makes it a preferred choice to replace solvent-based evaporative lubricants. Product is safe on steel, galvanize and aluminum.

**Multan® F 750™** – A water soluble synthetic fluid designed for use on light to heavy forming applications. Multan® F 750™ contains a temperature activated polymer, which is ideal for settings where elevated metal temperatures are possible in the operation.

**Parco® Lubricant® 747™** – Synthetic-based compound designed for drawing ferrous, galvanized and aluminum alloys. Its unique composition of corrosion inhibitors and lubricity additives provide a durable product for today's heavy drawing operations.

Products	Order Item Number	Container Weight (kg)	Container Size	Viscosity (cPs)	Typical Dilution	Boundary		EP Adds			Substrate				
						Fatty Acids	Esters	Chlorine	Phosphorous	Sulfur	Plain Steel	Galvanized / Zinc Alloy*	Yellow Metals*	Stainless Steel	Aluminum*
Multan® F 1009™	593857	209	Drum	460	5%-100%	X					X			X	
Multan® F 2004™	635811	18	Pail	1200	5%-100%	X			X		X			X	
	772350	215	Drum												
Multan® F 7270™	915861	18	Pail	850	20%-100%						X			X	X
	915862	209	Drum												
Multan® F 737™	985614	18	Pail	13	Neat						X	X	X	X	X
	595800	200	Drum												
Multan® F 750™	595446	209	Drum	120	5%-50%	X					X	X	X	X	X
	596044	18	Pail												
Parco® Lubricant® 747™	597523	18	Pail	Not Tested	5%-50%						X	X	X	X	X
	595363	204	Drum												

\* Individual alloys should be tested prior to recommendation.





# Metalworking Fluids

## METAL FORMING

### SOLUBLE OIL

**Multan® F 927 F™** – A soluble oil designed for drawing and stamping of ferrous, galvanized, aluminum and copper alloys. Its unique composition of corrosion inhibitors and Extreme Pressure (EP) additives provide a durable product for today's heavy drawing and stamping operations.

**Multan® F 927 KW™** – A soluble oil designed for drawing and stamping of ferrous, galvanized and aluminum alloys. Its unique composition of corrosion inhibitors, Extreme Pressure (EP) additives and lubricity additives provide a durable product for today's heavy drawing and stamping operations.

**Multan® F 985™** – Another versatile soluble oil fluid designed for stamping, drawing, machining and grinding both ferrous and nonferrous alloys. This material is safe on zinc-coated metals and performs well in stainless steel applications.

Products	Order Item Number	Container Weight (kg)	Container Size	Typical Dilution	Boundary		EP Adds			Substrate				
					Fatty Acids	Esters	Chlorine	Phosphorous	Sulfur	Plain Steel	Galvanized / Zinc Alloy*	Yellow Metals*	Stainless Steel	Aluminum*
Multan® F 927 F™	593842	222	Drum	10%-100%			X			X	X	X	X	X
	598113	18	Pail											
Multan® F 927 KW™	595294	204	Drum	10%-100%			X			X	X	X	X	X
	594263	19	Pail											
Multan® F 985™	593248	18	Pail	10%-100%	X	X		X	X	X	X		X	X

\* Individual alloys should be tested prior to recommendation.

### SOLVENT

**Multan® PL 633™** – Solvent-based fluid designed for use on light to medium forming applications. These applications could include stamping, punching, piercing or bending of metals. This product is suitable on all metal substrates including pre-painted materials. Examples of product usage include fin manufacturing, frames, brackets or floor molding.

Products	Order Item Number	Container Weight (kg)	Container Size	Viscosity (cPS)	Typical Dilution	Boundary		EP Adds			Substrate				
						Fatty Acids	Esters	Chlorine	Phosphorous	Sulfur	Plain Steel	Galvanized / Zinc Alloy*	Yellow Metals*	Stainless Steel	Aluminum*
Multan® PL 633™	594867	152	Drum	30	100%		X				X	X	X	X	X

\* Individual alloys should be tested prior to recommendation.



Henkel's full line of quality metal forming products for stamping and drawing are available in a variety of chemistries including straight oils, emulsions, synthetics or dry films.

### STRAIGHT OIL


**Multan® PL 1439™** – A low VOC lubricant designed for light high-speed stamping. It was designed primarily for fin stamping, used in the heating, cooling and radiator industry where excellent hydrolytic stability and refrigerant compatibility is required. Multan® PL 1439™ provides superior performance with low coating weights when used in conjunction with Henkel's Appli-Coater® lubricant delivery system.

**Multan® PL 298™** – An oil-based compound designed for tube hydroforming of ferrous and aluminum alloys. Its moderate viscosity allows for a wide range of additional uses in heavy metal forming operations.

**Multan® PL 198™** – An oil-based compound designed for tube hydroforming of ferrous and aluminum alloys. Its unique composition of Extreme Pressure (EP) additives and lubricity additives provides a durable product for today's heavy tubular hydroforming operations. Its unique properties including viscosity allow it to be used also in heavy or deep draws. Rollcoating, dripping, flooding, airless spraying, hand application and other techniques are suitable for application to the metal surface.

Products	Order Item Number	Container Weight (kg)	Container Size	Viscosity (cPs)	Typical Dilution	Boundary		EP Adds			Substrate				
						Fatty Acids	Esters	Chlorine	Phosphorous	Sulfur	Plain Steel	Galvanized / Zinc Alloy*	Yellow Metals*	Stainless Steel	Aluminum*
Multan® PL 1439™	994017	16	Pail	55	100%						X	X	X	X	X
	994018	171	Drum												
Multan® PL 198™	772632	191	Drum	1850SUS @100°F	100%	X			X	X	X	X	X	X	X
	721888	18	Pail												
Multan® PL 298™	928486	15	Pail	250	100%	X			X	X	X	X	X	X	X
	928485	181	Drum												

\* Individual alloys should be tested prior to recommendation.

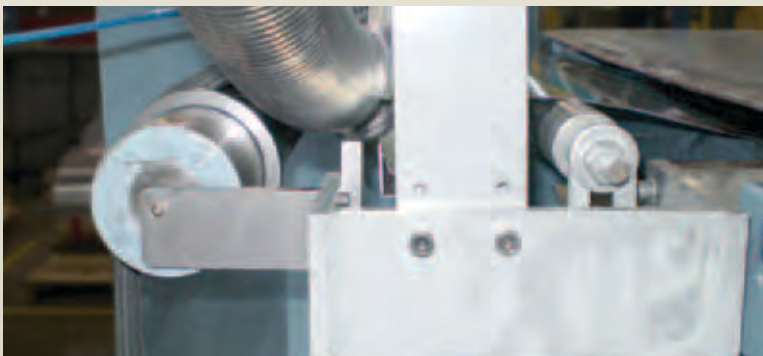



# Metalworking Fluids

## METAL ROLLING

### SYNTHETIC

Henkel's synthetic metal forming products for roll-forming are capable of meeting all metal types and end-use production needs.

**Multan® 3015™** – An oil-rejecting, synthetic fluid designed for machining, grinding and roll-forming ferrous and non-ferrous alloys. It is also suitable for use on brass, copper and other exotic metals.

**Multan® F 325™** – A water soluble, biodegradable, synthetic lubricant. Contains no mineral oil, chlorine or sulfur. Excellent for use in tube mills or roll-forming lines running ferrous or non-ferrous materials. Particularly suitable for galvanized and zinc-coated steel. Multan® F 325™ is widely employed by tube mills producing fence post or conduit, in addition to roll formers of construction related galvanized parts.

**Multan® F 329™** – A biodegradable, synthetic lubricant. Excellent for use in tube mills or roll-forming lines running ferrous or non-ferrous materials. Particularly suitable for galvanized and zinc-coated steel. Multan® F 329™ is designed to also provide additional interim corrosion protection on uncoated steel (e.g., CRS) goods prior to further processing.

Products	Order Item Number	Container Weight (kg)	Container Size	Concentrate Color	Rust-Free Conc. (%) - Cast Iron	Viscosity - H <sub>2</sub> O Solubles (cPs), Oils (Sus @ 100°F)	Oil Content Range (%)	Typical Concentration	EP ADDITIVES		SUBSTRATE COMPATIBILITY			
									Phosphorus	Sulfur	Steel	Cast Iron	Aluminum*	Yellow (Copper / Brass)*
Multan® 3015™	598154	20	Pail	Yellow	4		0	5%-10%			X	X		
	594286	214	Drum	Yellow	4		0	5%-10%			X	X		
Multan® F 325™	1249162	18	Pail	Red	4		0	5%-10%			X	X		
	1249164	209	Drum	Red	4		0	5%-10%			X	X		
Multan® F 329™	1327533	18	Pail	Red	3		0	5%-10%			X	X	X	
	1327535	206	Drum	Red	3		0	5%-10%			X	X	X	

\* Individual alloys should be tested prior to recommendation.

# Metalworking Fluids

## PROCESS CLEANERS

### NEUTRAL CLEANER

The unique composition of alkalinity, corrosion inhibitors and surfactants provides a durable, low-foaming, hard water-stable product for today's light- to moderate-duty cleaning and protecting needs.

**P3® Neutracare® 5088™** – A neutral-based cleaner with corrosion inhibitors designed for short-term corrosion protection on ferrous alloys provides a durable, low-foaming product for moderate-duty corrosion protection.

**P3® Neutracare® 5156™** – A neutral-based in-process cleaner with corrosion inhibitors designed for short-term corrosion protection on ferrous and aluminum alloys. Its unique composition of alkalinity, corrosion inhibitors, surfactants and biocides provides a durable low-foaming product for today's light- to moderate-duty cleaning and protecting needs.

**P3® Neutracare® 5175™** – A phosphated neutral cleaner with in-process corrosion prevention, designed to be used at a moderate temperature (120°F-160°F). For use on ferrous alloys only.

**P3® Neutracare® 5220-1™** – Neutral-based, in-process cleaner with corrosion inhibitors designed for short-term corrosion protection on ferrous, galvanized and aluminum alloys. Its unique composition of builders, corrosion inhibitors and surfactants provides a durable, low-foaming product for today's light- to moderate-duty cleaning and protecting needs.

Products	Order Item Number	Container Weight (kg)	Container Size	Cleaner Type	Oil Splitting	Ambient To 120°F	120°F To 160°F	160°F +	Borates	Phosphates	Spray	Immersion	Ferrous	Aluminum*
P3® Neutracare® 5088™	597978	18	Pail	Organic	X		X				X	X	X	X
	593241	209	Drum											
P3® Neutracare® 5156™	594045	211	Drum	Organic	X	X								
	596348	18	Pail											
P3® Neutracare® 5175™	1265623	18	Pail	Organic	X		X	X	X	X	X	X	X	
	1265826	232	Drum											
P3® Neutracare® 5220-1™	594241	234	Drum	Organic	X		X	X	X	X	X	X	X	X
	595321	18	Pail											

\* Individual alloys should be tested prior to recommendation.



# Metalworking Fluids CORROSION PREVENTATIVES

## P3® PREVOX SERIES OF CORROSION PREVENTATIVES

The P3® Prevox Series includes a full line of corrosion preventative fluids designed to extend life, improve quality and increase throughput. From synthetics to straight oils, our products for corrosion prevention contain necessary additives that meet the needs of light- to heavy-duty industry applications.

### SYNTHETIC

**P3® Prevox 4232™** – A synthetic corrosion inhibitor designed for short-term corrosion protection on ferrous alloys. Its unique composition provides a durable product for today's light-duty corrosion protecting needs.

**P3® Prevox 505™** – A synthetic corrosion inhibitor designed for short-term corrosion protection on ferrous alloys. Its unique composition provides a durable, low-foaming product for today's moderate-duty corrosion protecting needs.

**P3® Prevox 501™** – A synthetic corrosion inhibitor designed for short-term corrosion protection on ferrous alloys. Its unique composition provides a durable, low-foaming product for today's moderate-duty corrosion protecting needs.

Products	Order Item Number	Container Weight (kg)	Container Size	Storage	% Solids	Typical Dilution	Typical Storage Time*	Application		Film					Metals		
								Spray	Dip	Wax	Tacky	Oil	Fluid	Plastic / Crystalline	Steel	Cast Iron	Non-Ferrous**
P3® Prevox 4232™	594762	206	Drum	Short-Term		3%-20%	4 Wks.	X	X				X		X	X	
	595511	18	Pail														
P3® Prevox 501™	594014	18	Pail	In-Process	45	3%-20%	2 Wks.	X	X		X			X	X	X	
	595486	236	Drum														
P3® Prevox 505™	594827	213	Drum	Short-Term		3%-20%	4 Wks.	X	X				X		X	X	
	596698	18	Pail														

### SOLUBLE OIL

**P3® Prevox 5800™** – A soluble oil corrosion inhibitor designed for long-term corrosion protection on ferrous and non-ferrous alloys. Its unique composition provides a durable product for today's corrosion protecting needs.

Products	Order Item Number	Container Weight (kg)	Container Size	Storage	% Solids	Typical Dilution	Typical Storage Time*	Application		Film					Metals			
								Spray	Dip	Wax	Tacky	Oil	Fluid	Plastic / Crystalline	Steel	Cast Iron	Non-Ferrous**	
P3® Prevox 5800™	772736	16	Pail	EXTENDED	99	3%-20%	3 Mos.	X	X				X			X	X	X
	772736	184	Drum															

\* Typical storage time will vary depending upon concentration, environmental conditions and storage.

\*\* Individual alloys should be tested prior to recommendation.



## SOLVENT

**P3® Prevox 6041CR™** – A solvent-based corrosion inhibitor designed for extended corrosion protection on ferrous and galvanized alloys. Its unique composition provides a durable product for today's heavy-duty corrosion protecting needs.

**P3® Prevox 4141™** – This rust inhibiting, solvent-based corrosion inhibitor is designed for extended corrosion protection on ferrous and non-ferrous alloys. Its high flash point (143°F) allows for a safer work environment without compromising rust protection.

Products	Order Item Number	Container Weight (kg)	Container Size	Storage	Typical Dilution	Typical Storage Time*	Application			Film				Metals		
							Spray	Dip	Wax	Tacky	Oil	Fluid	Plastic / Crystalline	Steel	Cast Iron	Non-Ferrous**
P3® Prevox 6041CR™	594850	163	Drum	Extended	100%	6 Mos.	X	X			X			X	X	X
	596092	18	Pail													
P3® Prevox 4141™	879523	14	Pail	Extended	100%	6 Mos.	X	X	X					X	X	X
	879524	161	Drum													

## STRAIGHT OIL

**Multan® PL 101™** – This highly versatile oil-based product with multiple OEM approvals is used for light forming and can also serve as a ship out rust preventative.

Products	Order Item Number	Container Weight (kg)	Container Size	Storage	% Solids	Typical Dilution	Typical Storage Time*	Application			Film				Metals		
								Spray	Dip	Wax	Tacky	Oil	Fluid	Plastic / Crystalline	Steel	Cast Iron	Non-Ferrous**
Multan® PL 101™	783463	16	Pail	Extended	100	100%	3 Mos.	X	X			X			X	X	X
	594526	179	Drum														

\* Typical storage time will vary depending upon concentration, environmental conditions and storage.

\*\* Individual alloys should be tested prior to recommendation.



# Metalworking Fluids

## MAINTENANCE CLEANER, DEFOAMER AND ANTI-WELD SPATTER

### MAINTENANCE CLEANER

**P3® Multan® S™** – System cleaner designed to emulsify tramp oils and other contaminations in coolant systems. P3® Multan® S™ circulates with the coolant while production continues to operate and cleans the machine.

Products	Order Item Number	Container Weight (kg)	Container Size	Typical Dilution	Application	
					Spray	Dip
P3® Multan® S™	596071	18	Pail	2-5%	X	X
	596164	200	Drum			

### DEFOAMER

**Parco® Lubricant MP-705 DF™** – Water-based, synthetic, non-silicone defoamer designed to defoam today's machining and grinding fluids.

Products	Order Item Number	Liquid	Spray	Immersion	Substrate		
					Steel/Heavy Duty	Aluminum/Magnesium	Multi-Metal
Parco® Lubricant MP-705 DF™	593997	X	X	X			X

### ANTI-WELD SPATTER

**Parco® AWS 104™** – A water-based, synthetic, body-in-white anti-weld spatter agent material that stays wet after application. This product is applied prior to a welding operation and reduces the deposit of weld spatter on the unpainted metal.

Products	Order Item Number	Liquid	Spray	Immersion	Substrate			Etch Heavy Etch On Al & Zn	Temperature Operating Temperature	Builders				Inter-Stage Protection
					Steel/Heavy Duty	Aluminum/Magnesium	Multi-Metal			Sodium	Potassium	Phosphate	Gluconate	
Parco® AWS 104™	593054	X	X	X			X	X	140°F-210°F		X	X	X	
	593055													

# Product Index

747™	Parco® Lubricant® 747™	5	F 985™	Multan® F 985™	6
2140™	Multan® 2140™	4	F 1009™	Multan® F 1009™	5
2307GT™	Multan® 2307GT™	2	F 2004™	Multan® F 2004™	5
3015™	Multan® 3015™	8	F 7270™	Multan® F 7270™	5
3105™	Multan® 3105™	2	MP-705 DF™	Parco® Lubricant MP-705 DF™	12
3107™	Multan® 3107™	2	Neutracare® 5088™	P3® Neutracare® 5088™	9
5500™	Multan® 5500™	2	Neutracare® 5156™	P3® Neutracare® 5156™	9
8304™	Multan® 8304™	2	Neutracare® 5175™	P3® Neutracare® 5175™	9
9103™	Multan® 9103™	2	Neutracare® 5220-1™	P3® Neutracare® 5220-1™	9
AWS 104™	Parco® AWS 104™	12	PL 101™	Multan® PL 101™	11
B-236™	Multan® B-236™	3	PL 198™	Multan® PL 198™	7
B-414™	Multan® B-414™	3	PL 298™	Multan® PL 298™	7
B-524™	Multan® B-524™	3	PL 633™	Multan® PL 633™	6
CR 10™	Multan® CR 10™	4	PL 1439™	Multan® PL 1439™	7
CR 20™	Multan® CR 20™	4	Prevox 501™	P3® Prevox 501™	10
CR 26™	Multan® CR 26™	4	Prevox 505™	P3® Prevox 505™	10
CR 67IC™	Multan® CR 67IC™	4	Prevox 4141™	P3® Prevox 4141™	11
CR 67™	Multan® CR 67™	4	Prevox 4232™	P3® Prevox 4232™	10
F 325™	Multan® F 325™	8	Prevox 5800™	P3® Prevox 5800™	10
F 329™	Multan® F 329™	8	Prevox 6041CR™	P3® Prevox 6041CR™	11
F 737™	Multan® F 737™	7	S™	P3® Multan S™	12
F 750™	Multan® F 750™	7			
F 927 F™	Multan® F 927 F™	6			
F 927 KW™	Multan® F 927 KW™	6			



## **USA**

Henkel Corporation  
One Henkel Way  
Rocky Hill, Connecticut 06067  
Tel: 1.800.562.8483  
Tel: 860.571.5100  
Fax: 860.571.5465

## **CANADA**

Henkel Canada Corporation  
Engineering Adhesives  
2225 Meadowpine Blvd.  
Mississauga, Ontario L5N 7P2  
Tel: 1.800.263.5043 (within Canada)  
Tel: 905.814.6511  
Fax: 905.814.5391



**Henkel Corporation  
Engineering Adhesives  
One Henkel Way  
Rocky Hill, CT 06067  
U.S.A.**

**[www.henkeln.com/industrial](http://www.henkeln.com/industrial)  
[www.loctite.com](http://www.loctite.com)**

Except as otherwise noted, all marks used are trademarks and/or registered trademarks of Henkel and/or its affiliates in the U.S. and elsewhere. ® = registered in the U.S. Patent & Trademark Office.  
© 2011, Henkel Corporation. All rights reserved. 6928/LT-6266 (2/11)