



## TLD (Torque Limiting Device)



Factory preset torque value

- Wide range of factory preset torque limiting handles – no adjustment needed
- When the preset torque level is reached, the mechanism slips and makes an audible “click”
- Protects from overtorquing
- Reduces fastener wear and stripping
- Reduces potential damage to carbide inserts
- Fits all TORX® and Star fasteners
- +/- 10% repeatability

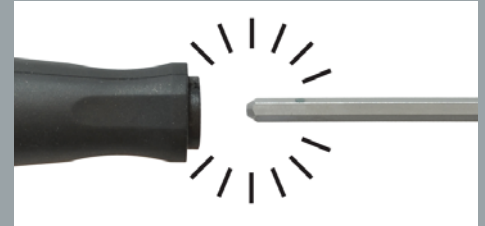

Replaceable blades snap into handle, simplifying blade replacement.



The Bondhus ComfortGrip handle features a durable thermoplastic core wrapped in cushioned rubber for increased comfort and torque.



Ergonomically designed handles deliver unrivaled comfort and grip.



Slight texture of handle helps retain grip, even when hands are wet or oily.



Economical solution to an expensive problem



High Torque Steel:

Up to 20% stronger, with more torque and twice the wear resistance of standard grades of steel.

### FINISH OPTION:

**TUFFKOTE™** Impermeable polymer surface:  
PTFE Finish

Impermeable PTFE (with TEFLON® material) added to finish for extra corrosion protection. Environmentally friendly finish, free of harsh chemicals, acids, and metals.



Scan the tag for a short video




**ClickSet™**

## TLD (Torque Limiting Device)


When “**tight enough**” isn’t “**close enough**,” Bondhus Torque Limiting ClickSet™ (TLD) tools set it right.

- Wide range of preset torque limiting screwdrivers
- No more overtorquing
- No more stripped fasteners
- Fits all TORX® and Star fasteners

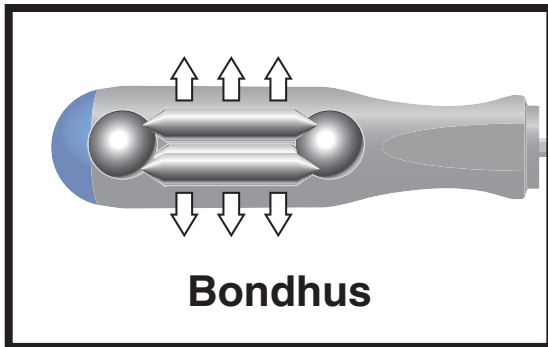

**Bondhus**

Bondhus ClickSet™ Torque Limiting Screwdrivers distribute the torque load along the handle, redistributing force over a larger surface for greater accuracy and longer tool life.

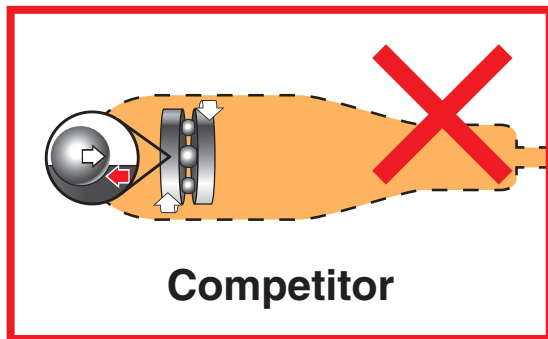

**Competitor**

Competitor torque limiting tools use ball bearings or teeth to carry the torque load across the handle, wearing out the mechanism quickly.

	PART #	TORQUE	QTY
<b>Handles Only</b>	50404	4.4 in-lb/0.5 Nm	1
	50405	5.3 in-lb/0.6 Nm	1
	50408	8.0 in-lb/0.9 Nm	1
	50409	9.7 in-lb/1.1 Nm	1
	50410	10.6 in-lb/1.2 Nm	1
	50412	12.4 in-lb/1.4 Nm	1
	50417	17.7 in-lb/2.0 Nm	1
	50422	22.1 in-lb/2.5 Nm	1
	50426	26.6 in-lb/3.0 Nm	1
	50431	31.0 in-lb/3.5 Nm	1



	PART #	SIZE	QTY
<b>Inch Hex</b>	50102	.050"	1
	50103	1/16"	1
	50104	5/64"	1
	50105	3/32"	1
	50106	7/64"	1
	50107	1/8"	1
	<b>Metric Hex</b>	50150	1.5mm
50152		2.0mm	1
50154		2.5mm	1
50156		3.0mm	1
<b>TORX®</b>		50205	T/IP5
	50206	T/IP6	1
	50207	T/IP7	1
	50208	T/IP8	1
	50209	T/IP9	1
	50210	T/IP10	1
	50215	T/IP15	1



	PART #	HANDLE TORQUE	BLADE TIP	QTY
<b>TORX®</b>	50004	4.4 in-lb/0.5 Nm	T/IP5	1
	50005	5.3 in-lb/0.6 Nm	T/IP6	1
	50008	8.0 in-lb/0.9 Nm	T/IP7	1
	50010	10.6 in-lb/1.2 Nm	T/IP8	1
	50012	12.4 in-lb/1.4 Nm	T/IP9	1
	50017	22.1 in-lb/2.5 Nm	T/IP10	1
	50026	31.0 in-lb/3.5 Nm	T/IP15	1



## ClickSet™ 1/4" Magnetic Bit Holder

- Accepts all 1/4" bits

PART #	SIZE	QTY
50125	.050"	1



Distributed by:

### Bondhus Corporation

1400 E Broadway • PO Box 660 • Monticello, MN 55362  
Tel: 763-295-2162 • Toll Free: 800-328-8310 • Fax: 763-295-4440

TEFLON® is a registered trademark of E.I. du Pont de Nemours and Co.

TORX® and TORX PLUS® are registered trademarks of Acument Intellectual Properties, LLC.

Bondhus, Protanium, TuffKote and ClickSet are trademarks of Bondhus Corporation.